

A robust chem-free printing plate with outstanding performance for commercial print jobs.

Unique in its class, Adamas is a non-ablative, pre-heat-free, chem-free printing plate that doesn't require pre-heating and offers outstanding performance. Based on patented ThermoLink technology, this plate covers an extensive range of demanding commercial printing applications.




Adamas

Unbeatable performance

For those who insist on delivering supreme image quality, productivity, and versatility with a minimal ecological footprint, Agfa offers Adamas - a robust, chem-free photopolymer plate that does not require pre-heating and offers outstanding performance.

Adamas combines an image quality of 240 lpi Sublima, a run length of up to 350,000 revolutions with predictable sharp dot reproduction and compatibility with most thermal platesetters on the market. To unlock this plate's full potential, combine it with one of Agfa's dedicated and compact Adamas COU clean-out units.

The printing plate covers a wide range of applications in commercial printing (e.g. web and sheetfed printing, including conventional UV and H-UV/LED-UV inks).

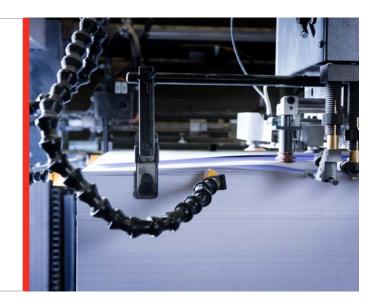





Razor-sharp results

When you opt for Adamas, you opt for a high-contrast plate with photorealistic image quality up to 240 lpi Sublima screening, depending on your platesetter. Thanks to its protective layer, which prevents oxidation and eliminates ablation, Adamas is a durable and low-maintenance product.

Productivity made simple


A highly sensitive printing plate, Adamas is designed to handle print runs of up to 350,000 copies. It combines fast, accurate and wide-latitude plate exposure with simple processing and robustness. In fact, Adamas allows for conventional and H-UV/LED-UV printing (with a run length of up to 75,000 revolutions) and can handle even abrasive substrates like boards. Its highlight dots are tough enough to offer a high-quality press performance even on the longest press runs.

A variety of applications

Thanks to its robustness, Adamas covers a wide range of demanding print applications - from heatset to commercial sheetfed UV.

- ✓ Heatset applications: magazines, catalogs, books, flyers etc.
- ✓ Sheetfed applications: compatible with conventional and H-UV/LED-UV inks



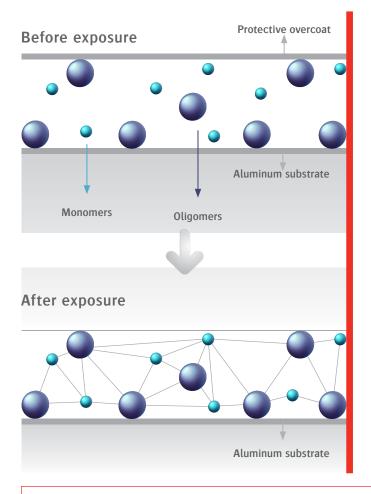

Optimal convenience

While Adamas' robust and scratch-resistant surface allows for easy handling, its strong image contrast supports simple visual inspection and quality control, ensuring plates are mounted on press correctly. Adamas is made of high-grade aluminum, which prevents costly and time-consuming mistakes and remakes, and can be processed in office light conditions.

Patented ThermoLink technology

As a cutting-edge photopolymer plate, Adamas is based on Agfa's patented ThermoLink technology. Thanks to the ThermoLink technology, the plate compounds are cross-linked without pre-heating, resulting in robustness, high image quality and optimal press performance. This swift polymerization process also ensures a predictable, sharp dot reproduction, making Adamas close to a linear plate.

Adamas COU – dedicated clean-out units that take ecology to the next level

To unlock the full potential of the Adamas plate, it should be combined with one of Agfa's dedicated Adamas clean-out units. The compact Adamas COUs, are based entirely on sustainable innovation that targets ecology, economy and extra convenience (Agfa's ECO3 approach).

Relying on a two-gum concept — dedicated, pH-neutral clean-out gum and protective finishing gum — this clean-out series requires only small quantities of liquid (50 ml/m2) and minimal energy to swiftly clean Adamas plates. With a long gum bath life and no water requirement, Adamas COU solutions are showpieces of green technology.

Choose your model: connected online with the platesetter, or stand-alone. There's no need for a developer or replenisher and everything is pre-set. So once the Adamas clean-out unit is installed, you're good to go: the unit is designed to handle up to $60,000 \, \text{m}^2$ of plates a year!

The Adamas COU is available in three different sizes: Adamas COU85, Adamas COU125 and Adamas COU150.





ECO³

Agfa is committed to sustainable innovation that focuses on ecology, economy, and extra convenience—or ECO³. Our hardware, software and consumables make your prepress and printing operations cleaner, more cost-effective and easier to operate and maintain.

The ultimate goal? More value for your entire printing business!

Technical specifications

PLATE CHARACTERISTICS				
Technology	Chemistry-free ThermoLink technology			
Substrate	High-quality grained and anodized aluminum			
Spectral sensitivity	830 nm thermal			
Energy				
Platesetter compatibility	Accredited for most common 830 nm external drum platesetters			
Image contrast	Excellent. The plates can be measured with all available densitometers and plate readers.			
Plate sizes	All common plate sizes			
Gauges	0.15-0.40 mm (0.006-0.016")			
Resolution	Sublima 240 lpi at 2400 dpi			
Applications	Web, sheetfed UV and low-power UV inks			
Run length	Up to 350,000 Up to 75,000 in UV			
CLEANING OUT				
Developer	none			
Clean-out gum	Adamas gum			
Replenishment rate	50 ml/m ²			
Bath life	8,000 m ² or 12 weeks			
Finisher	Unifin, RC795			
Clean-out unit	Adamas 85 COU, Adamas 125 COU and Adamas 150 COU			
ENVIRONMENT				
Light conditions	Daylight			
Room conditions (T, RH)	19-24 °C (64-75 °F), < 70% RH			
Storage conditions	Below 32 °C (90 °F), <70% RH			

AGFA'S PRESSROOM CHEMICALS			
Plate correction pen (for unbaked plates)	Polymer deletion pen		
Scratch remover	Reviva Plate		
Plate cleaner	Standard: ANTURA CtP Plate Cleaner / UV: ANTURA UV PL CLEANER / Dual purpose gum: ANTURA CleanGum		
Fountain solutions	Sheetfed IPA free: ANTURA fount AFS2 / Sheetfed IPA reduced: Prima FS404AS / Sheetfed Conv.: RC661 , Prima FS605 (UV) / Small Offset : RC63 / Heatset: ANTURA fount HS PLUS / ANTURA IPA 100		
Rehardener	Standard: RC611 / For RO water: ANTURA water conditioner		
Roller and blanket washes	Standard: Xtrawash Plus 40 & 60 / UV: ANTURA UV74 wash / Heatset: ANTURA wash WEB / Rejuvenator: Reviverol Plus		

ADAMAS CLEAN-OUT UNITS	ADAMAS COU85	ADAMAS COU125	ADAMAS COU150
Plate width min/max	200-850 mm (7.9-33.5")	200-1250 mm (7.9-49.2")	200-1480 mm (7.9-58.2")
Plate length min/max	275 mm (10.8")	275 mm (10.8")	275 mm (10.8")
Plate thickness	0.15-0.30 mm (0.006-0.012")	0.15-0.40 mm (0.006-0.016")	0.15-0.40 mm (0.006-0.016")
Processing speed	120-160 cm/min (47-63 inch/min)	120-160 cm/min (47-63 inch/min)	160 cm/min (63 inch/min)
Power	2900 Watt	2900 Watt	2900 Watt
Weight	280 kg (616 lb)	360 kg (792 lb)	430 kg (946 lb)
Dimensions	1424 x 1122 x 1000 mm (56.06 x 44.17 x 39.37")	1824 x 1122 x 1000 mm (71.81 x 44.17 x 39.37")	2074 x 1122 x 1000 mm (81.65 x 44.17 x 39.37")